


# RELIABLE CONNECTIONS WITH STAINLESS STEEL INSERT PEX & PE-RT FITTINGS AND VALVES NOW AVAILABLE UP TO 2"



## 30 Year Warranty

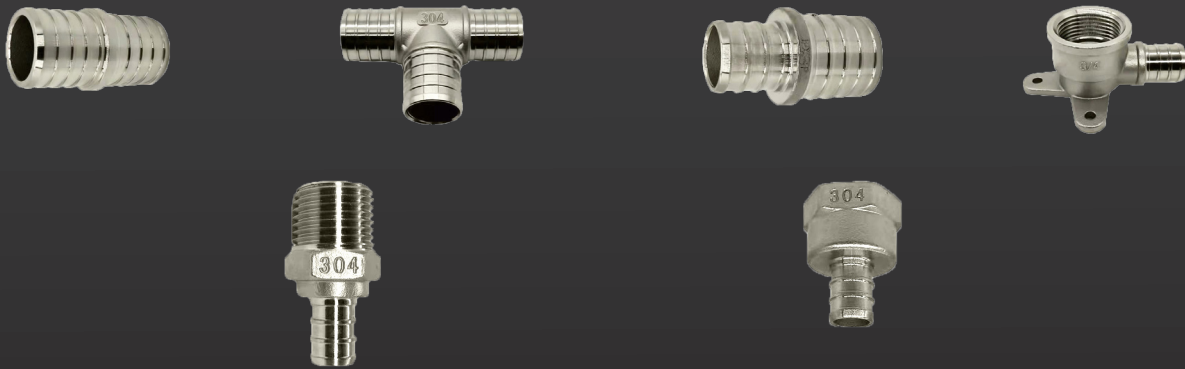

### SECURE EVERY CONNECTION

CB Supplies offers a full range of PEX and PE-RT fittings and valves. Now introducing Lead-Free Stainless Steel, backed by a 30-Year Warranty for peace of mind.



An Addition to our  
**TOTAL**  
**SYSTEM SOLUTION**



# Stainless Steel Insert PEX & PE-RT Fittings

Stainless Steel Insert PEX & PE-RT Lead Free (LF) fittings are the ideal choice for PEX & PE-RT applications. They deliver premium quality and durability, featuring excellent corrosion resistance, suited for areas with acidic conditions and water quality concerns.



## Specifications

- 304 Stainless Steel
- Compatible with SDR9 PE-RT pipe (ASTM F2769, ASTM F2623)
- Compatible with SDR9 PEX pipe (ASTM F876)
- PEX / PE-RT ends conform to ASTM F1807 (crimp)
- Threads conform to ASME B1.20.1
- Maximum Pressure Rating: 100 PSI
- Temperature Range: Up to 180°F (82°C)
- Available sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2" and 2" diameters



# Stainless Steel Insert PEX & PE-RT Ball Valves

Ideal for PEX & PE-RT applications, Lead Free (LF) Stainless Steel Insert Ball Valves offer durability and performance. Featuring easy turn operation and robust construction, they deliver premium quality with excellent corrosion resistance, suited for areas with acidic conditions and water quality concerns.



## Specifications

- 304 Stainless Steel components
- Compatible with SDR9 PE-RT pipe (ASTM F2769, ASTM F2623)
- Compatible with SDR9 PEX pipe (ASTM F876)
- PEX / PE-RT ends conform to ASTM F1807 (crimp)
- Max Pressure Rating: 600 PSI CWP (Cold Working Pressure) up to +100°F (37°C)
- Max Temperature Rating: -40°F to 200°F (-40°C to 93°C)
- Two-piece investment cast body
- Blow-out proof stem
- Solid Stainless Steel Ball
- Stainless steel handle with blue plastic sleeve
- Available sizes: 1/2", 3/4", 1", 1 1/4", 1 1/2" and 2" diameters